

ZN63A-12 Indoor Medium-voltage AC Vacuum Circuit Breaker

1 Overview




ZN63A(VS1)-12 Indoor high voltage AC vacuum circuit breaker (hereinafter referred to circuit breaker) is used in the three-phase AC 50Hz indoor place with the rated voltage 12kV as the protection and control of the electrical facilities in the industrial mines, enterprises, power plant, and power substation, especially suitable for metallurgy, chemical, and coal industries.

Circuit breaker complies with the GB/T 1984 High Voltage AC Circuit Breaker, GB/T 11022 Common specifications for high-voltage switchgear and controlgear standards, DL/T 402 High Voltage AC Circuit Breaker, and related IEC standards.

The operating mechanism of circuit breaker is of the integrated design type. The operating mechanism and the primary circuit are front and back arranged, and they can be used as fixed installation unit (fixed cabinet) and also form a cart unit (cart cabinet) together with the propulsion mechanism (chassis truck).

2 Type Designation

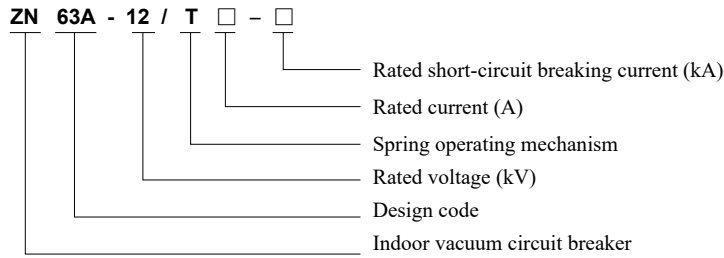

3 Technical Parameters

3.1 Main Technical Parameters

| No. | Item | Unit | Data | | |
|-----|--|-------|--|------------|-------------------|
| 1 | Rated voltage | kV | 12 | | |
| 2 | Rated lightning impulse withstand voltage (peak) | | Gap 85, interphase, and to earth 75 | | |
| 3 | Rated power frequency withstand voltage (1min) | | Gap 48, interphase, and to earth 42 | | |
| 4 | Rated frequency | Hz | 50 | | |
| 5 | Rated short circuit breaking current | kA | 20, 25 | 31.5 | 40 |
| 6 | Rated current | A | 630 ~ 1250 | 630 ~ 4000 | 1250 ~ 4000 |
| 7 | Rated short time withstand current | kA | 630 ~ 1250 | 630 ~ 4000 | 1250 ~ 4000 |
| 8 | Rated peak withstand current | | 50, 63 | 80 | 100 |
| 9 | Rated short circuit making current (peak) | kA | 50, 63 | 80 | 100 |
| 10 | Secondary circuit power frequency withstand voltage (1min) | V | 2000 | | |
| 11 | Rated operation sequence | | O—0.3s—CO—180s—CO | | O—180s—CO—180s—CO |
| 12 | Rated short circuit duration time | s | 4 | | |
| 13 | Rated single/back-to-back capacitor bank breaking current | A | 20 ~ 31.5kA | | 40kA |
| | | | 630/400 | | 800/400 |
| 14 | Rated capacitor bank inrush making current | KA | 12.2 (frequency not greater than 1000Hz) | | |
| 15 | Mechanical life | Times | 10000/customized | | |
| 16 | Rated short circuit current switching times | | 30 | | |
| 17 | Allowable wear accumulative thickness of the moving and stationary contact | mm | 3 | | |

ZN63A-12 Indoor Medium-voltage AC Vacuum Circuit Breaker

| No. | Item | Unit | Data |
|-----|--|------|---|
| 18 | Rated closing and opening operating voltage | V | 220, 110 |
| 19 | Contact opening distance, overstroke | | Opening 9±1 (11±1) Overstroke 3.5±0.5 |
| 20 | Rated operating voltage: ON/OFF time | | ON 30-70 OFF 20-50 |
| 21 | Contact closing bounce time* | ms | ≤2 (1600A and below), ≤3 (2000A and above) |
| 22 | Three-phase closing and opening simultaneity | | ≤2 |
| 23 | Average opening speed (contact open 6mm) | m/s | 0.9 ~ 1.3 |
| 24 | Average closing speed | | 0.4 ~ 0.8 |
| 25 | Main circuit resistance | μΩ | 630A: ≤55 1250A ≤50 1600, 2000A: ≤40 2500A and above ≤30 |
| 26 | Closing contact touch pressure | N | 20kA, 25kA: 2400±150 31.5kA: 3200±200 40kA: 4500±300 |

*When the contact arm is not installed

3.2 Technical Data of Energy-Saving Motor

This product adopts special reducer used for permanent magnet type single-phase DC motor, and the technical parameters of motor are listed in table below.

| Rated voltage (V) | Rated output power (W) | Normal operating voltage range | Energy storage time under rated voltage (s) |
|-------------------|------------------------|--------------------------------|---|
| DC220 | 70/100 | 85%~110% rated voltage | ≤15 |

3.3 Technical Data of Electromagnet

| | Closing electromagnet | Opening electromagnet | Locking electromagnet | Anti-bounce relay |
|-----------------------------|------------------------|------------------------|------------------------|-------------------|
| Rated operating voltage (V) | DC220 | DC220 | DC220 | DC110 |
| Coil power (W) | 368 | 368 | 4 | 1.0 |
| Resistance (Ω) | 131.5±5% (20°C) | 131.5±5% (20°C) | 13600±5% (20°C) | 12100±5% (20°C) |
| Operating voltage range | 85%~110% rated voltage | 65%~120% rated voltage | 85%~110% rated voltage | |

ZN63A-12 Indoor Medium-voltage AC Vacuum Circuit Breaker

4 Operating Conditions

4.1 Normal Working Conditions

- 4.1.1 Ambient temperature: The max. temperature is +40°C, and the min. temperature is -15°C (storage and transport at -30°C are allowed);
- 4.1.2 Environmental humidity: The daily mean relative humidity is $\leq 95\%$, the monthly mean relative humidity is $\leq 90\%$; the daily mean vapor pressure is $\leq 2.2 \times 10^{-3}$ MPa, and the monthly mean vapor pressure is $\leq 1.8 \times 10^{-3}$ MPa;
- 4.1.3 The altitude does not exceed 1000m (customization is required if greater than 1000m);
- 4.1.4 The earthquake intensity does not exceed 8 degrees;
- 4.1.5 There is no water drops, no flammable materials, no chemical corrosive gas and no severe vibration at the site.
- 4.2 If the normal working conditions are not met, please contact the manufacturing unit.

5 Features

5.1 Excellent performance of circuit breaker

- 5.1.1 The arc extinguish chamber and operating mechanism of circuit breaker are configured at front and rear, and are connected into a whole through the transmission mechanism.
- 5.1.2 The mechanical life is not below 10,000 times.

5.2 The advanced vacuum arc extinguish chamber uses copper-chromium alloy contact and longitudinal magnetic field contact structure.

5.3 Enhanced insulating cylinder

- 5.3.1 The insulating cylinder is formed with new APG process.
- 5.3.2 The inner skirt edge and reinforced ribs are provided in the insulating cylinder, improving the insulation level and dynamic stable current resistant capacity.
- 5.3.3 The vacuum arc extinguish chamber is installed in an insulating cylinder to efficiently prevent damage and surface contamination due to foreign matters while shortening the overall size of circuit breaker obviously.


5.4 Flexible and simple operating mechanism

- 5.4.1 The operating mechanism is of the spring energy-storage type with electric and manual energy storage functions.
- 5.4.2 When the circuit breaker is working, the energy from the energy-storage spring will be transferred to the link mechanism through the output cam and then to the dynamic contact through the link mechanism.
- 5.4.3 With advanced and reasonable damping device, the break-brake rebound is small.
- 5.4.4 No adjustment is required with very little maintenance.

ZN63A-12 Indoor Medium-voltage AC Vacuum Circuit Breaker

6 Outline and Installation Dimensions


6.1 Outline dimensions of handcart type circuit breaker(Phase distance 210, pole distance 275)

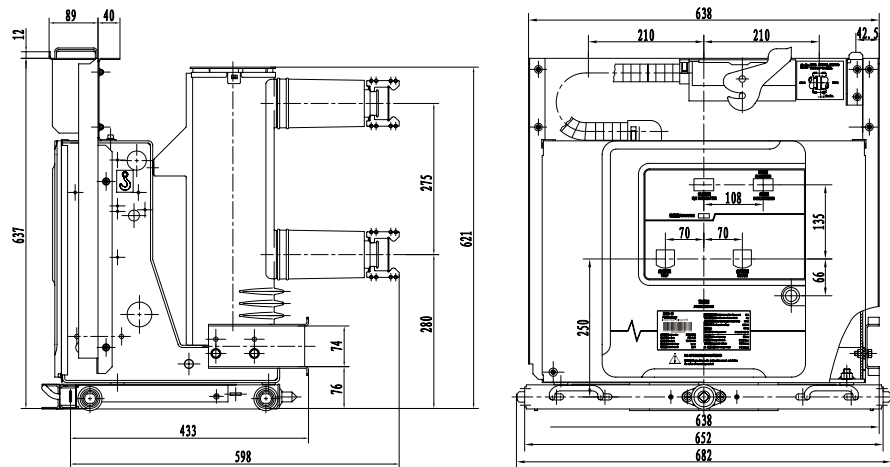

Note: The handcart stroke is 200±2mm.

| Rated current (A) | 630 | 1250 | 1600 |
|---|------------|------------|---------|
| Rated short circuit breaking current (kA) | 20/25/31.5 | 25/31.5/40 | 31.5/40 |
| Mating fixed contact size (mm) | φ35 | φ49 | φ55 |

6.2 Outline dimensions of handcart type circuit breaker(Phase distance 275, pole distance 275)

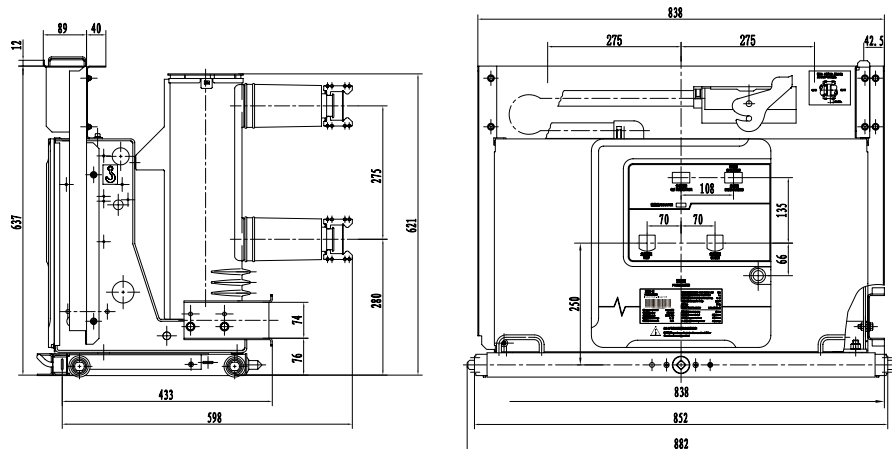


Note: The handcart stroke is 200±2mm.

| Rated current (A) | 630 | 1250 | 1600 |
|---|------------|------------|---------|
| Rated short circuit breaking current (kA) | 20/25/31.5 | 25/31.5/40 | 31.5/40 |
| Mating fixed contact size (mm) | φ35 | φ49 | φ55 |

ZN63A-12 Indoor Medium-voltage AC Vacuum Circuit Breaker


6.3 Outline dimensions of handcart type circuit breaker(Phase distance 275, pole distance 310)

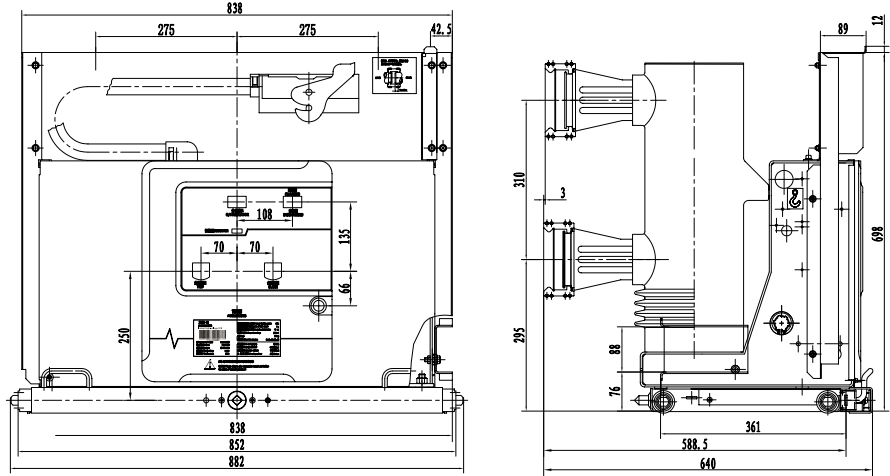

Note: The handcart stroke is 200±2mm.

| Rated current (A) | 1600 | 2000 | 2500 | 3150 | 4000 |
|---|---------|------|------|---------|------|
| Rated short circuit breaking current (kA) | 31.5/40 | | | 31.5/40 | |
| Mating fixed contact size (mm) | φ49 | | | φ109 | |


6.4 Outline dimensions of fixed type circuit breaker(Phase distance 210, pole distance 275)

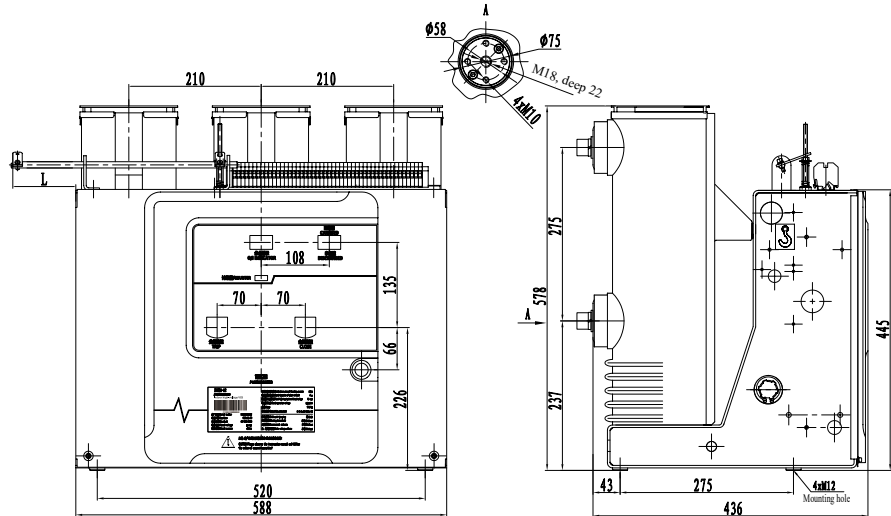

| Rated current (A) | 630 | 1250 | 1600 |
|---|--|------------|---------|
| Rated short circuit breaking current (kA) | 20/25/31.5 | 25/31.5/40 | 31.5/40 |
| Mechanism top interlock L (mm) | 50/100(The interlock can be extended left or right, and the length can be customized according to customer requirements) | | |

ZN63A-12 Indoor Medium-voltage AC Vacuum Circuit Breaker


6.5 Outline dimensions of fixed type circuit breaker(Phase distance 275, pole distance 275)

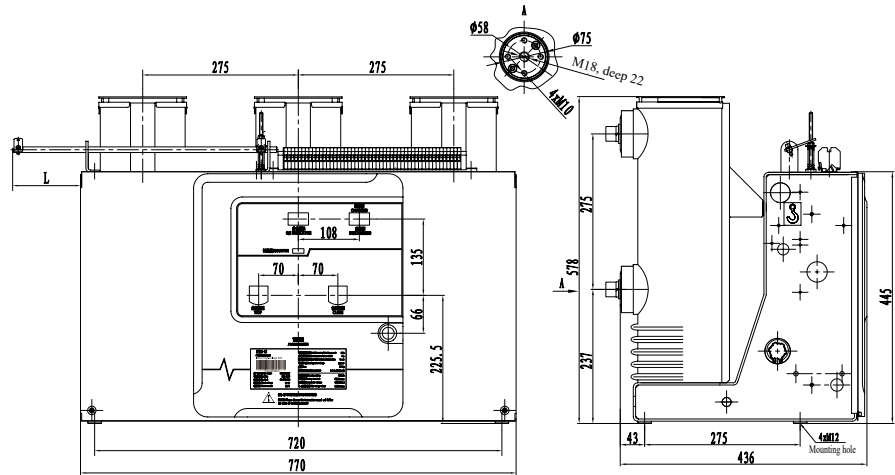

Note: Forced air cooling is required for 3150A and above, and the dimensions in brackets are the reference dimensions of rated current 3150A and above

| Rated current (A) | 630 | 1250 | 1600 |
|---|--|------------|---------|
| Rated short circuit breaking current (kA) | 20/25/31.5 | 25/31.5/40 | 31.5/40 |
| Mechanism top interlock L (mm) | 50/100(The interlock can be extended left or right, and the length can be customized according to customer requirements) | | |


6.6 Outline dimensions of fixed type circuit breaker(Phase distance 275, pole distance 310)

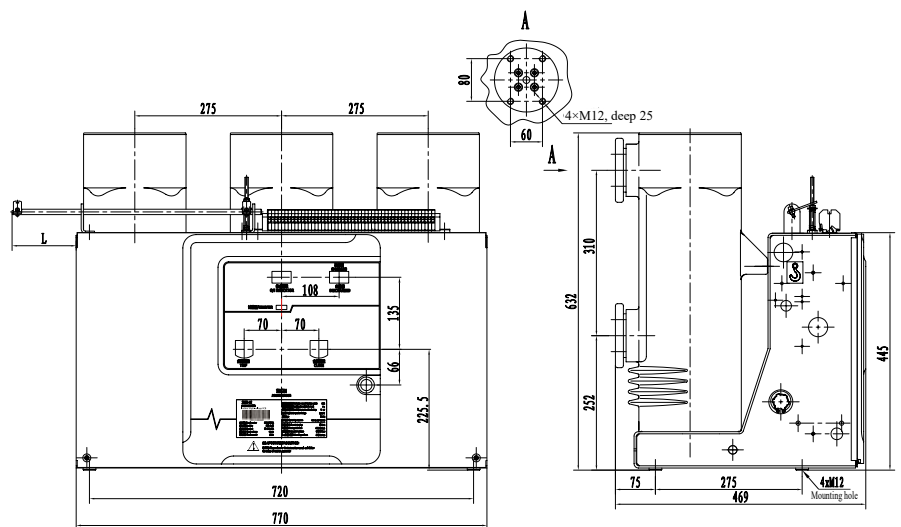

| Rated current (A) | 1600 | 2000 | 2500 | 3150 | 4000 |
|---|--|------|------|------|------|
| Rated short circuit breaking current (kA) | 31.5/40 | | | | |
| Mechanism top interlock L (mm) | 50/100(The interlock can be extended left or right, and the length can be customized according to customer requirements) | | | | |

ZN63A-12 Indoor Medium-voltage AC Vacuum Circuit Breaker


6.7 Outline dimensional drawings of side-mounted fixed type circuit breaker (for reference only, the actual order will prevail)

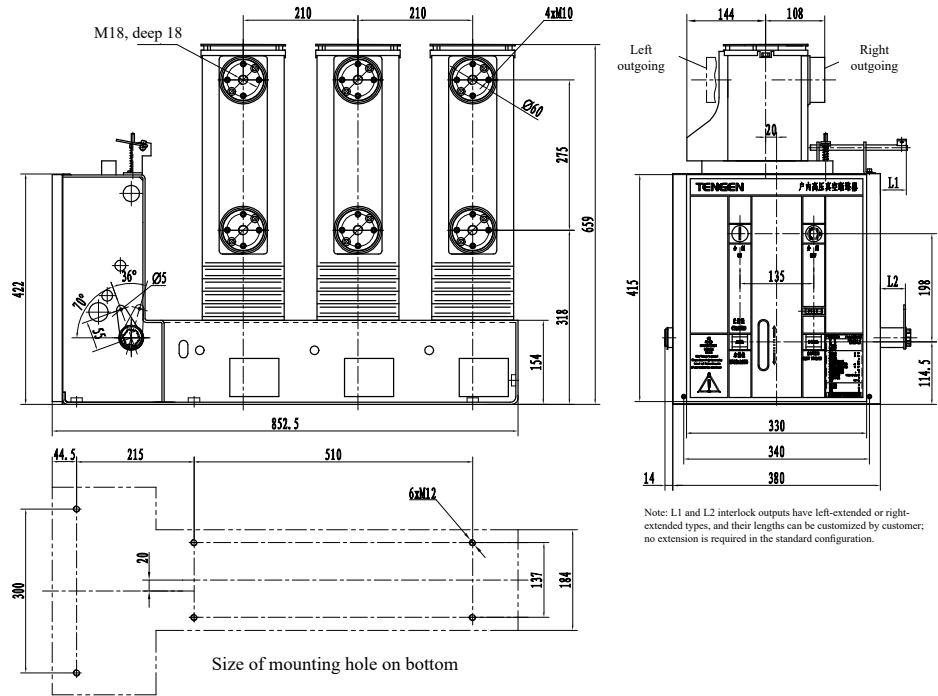

ZN63A-12 Indoor Medium-voltage AC Vacuum Circuit Breaker

7 Secondary Scheme Schematic Diagram

7.1 Handcart type scheme

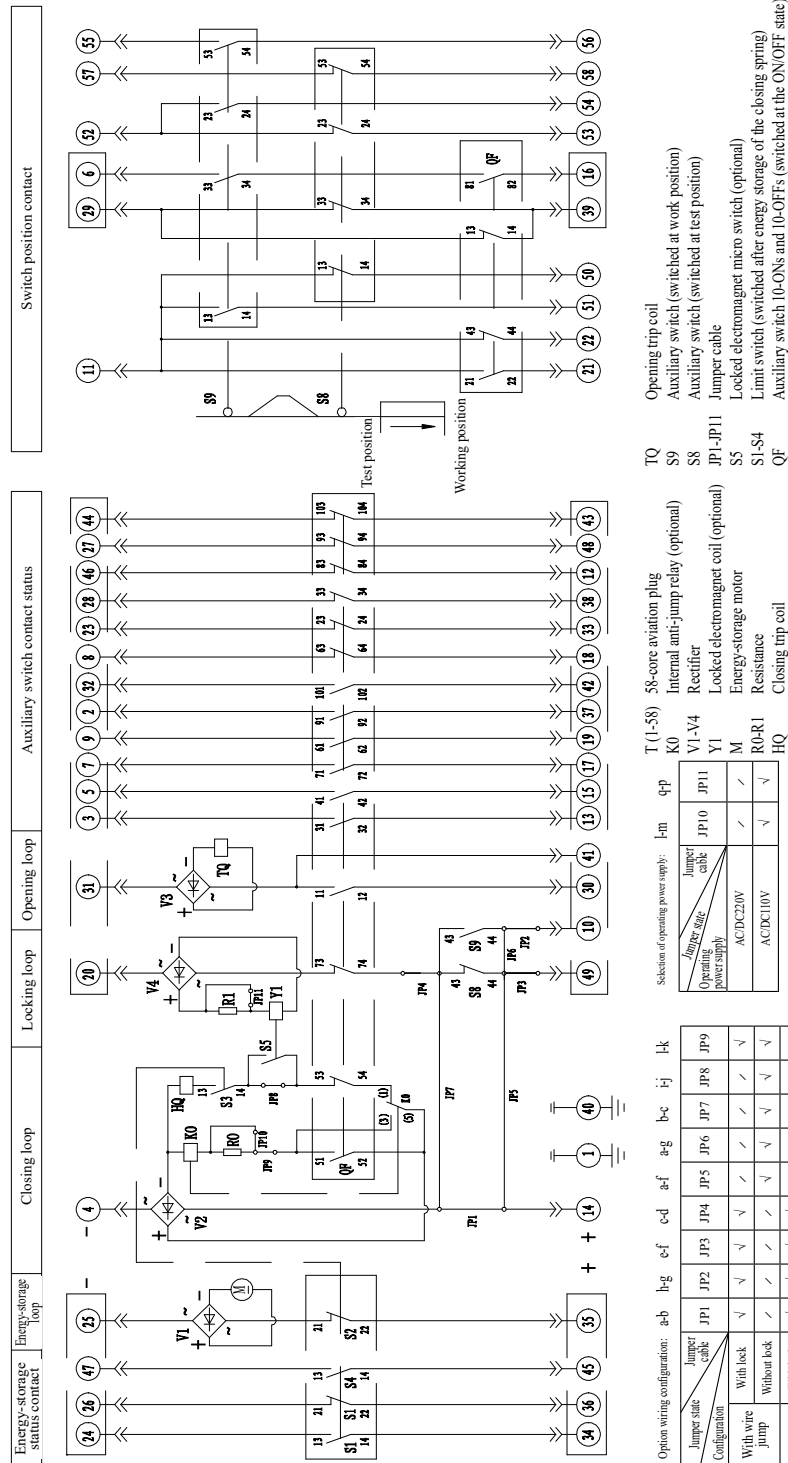


Notes:

1. The circuit breaker is at the test position, is opened and at the non-energy-storage state.
2. The polarities marked in the dashed box shall be the same during the DC power operation, and the motor shall be wired according to the polarity shown in figure.

ZN63A-12 Indoor Medium-voltage AC Vacuum Circuit Breaker

7.2 Fixed type scheme

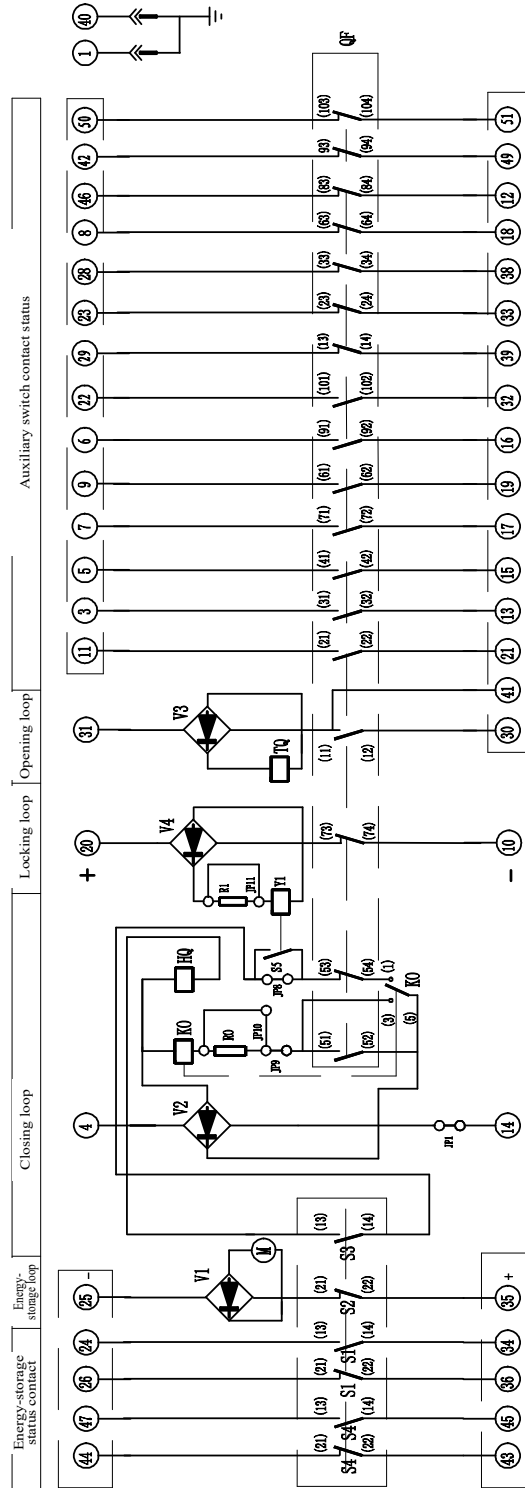

- S1-4: Micro switch (switched after energy storage of the closing spring)
- S5: Micro switch (optional)
- TQ: Closing coil
- TO: Opening coil
- M: Energy-storage motor
- R0-R1: Resistance
- V1-V4: Rectifier
- JP8-JP11: Jumper cable

Notes:

- The polarities marked in the dashed box are the same when the DC power supply is used.
- As shown in figure, the circuit breaker is at the open and non-energy-storage state; the motor is wired according to the polarity shown in figure.


Option wiring setting:

| Jumper cable Configuration | JP1 (a-b) | JP2 (b-g) | JP3 (c-f) | JP4 (c-d) | JP5 (a-f) | JP6 (e-g) | JP7 (b-e) | JP8 (+) | JP9 (-) |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|---------|
| With lock | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Without lock | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| With lock wire jump | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Without lock wire jump | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Selection of operating power supply:


| Jumper cable | JP10 (l-m) | JP11 (q-r) |
|------------------------|------------|------------|
| Operating power supply | ✓ | ✓ |
| AC/DC230V | ✓ | ✓ |
| AC/DC110V | ✓ | ✓ |

Note: "-" means disconnection, and "-" means connection

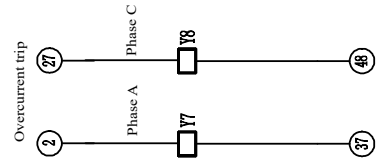

ZN63A-12 Indoor Medium-voltage AC Vacuum Circuit Breaker

7.3 Side-mounted fixed type scheme

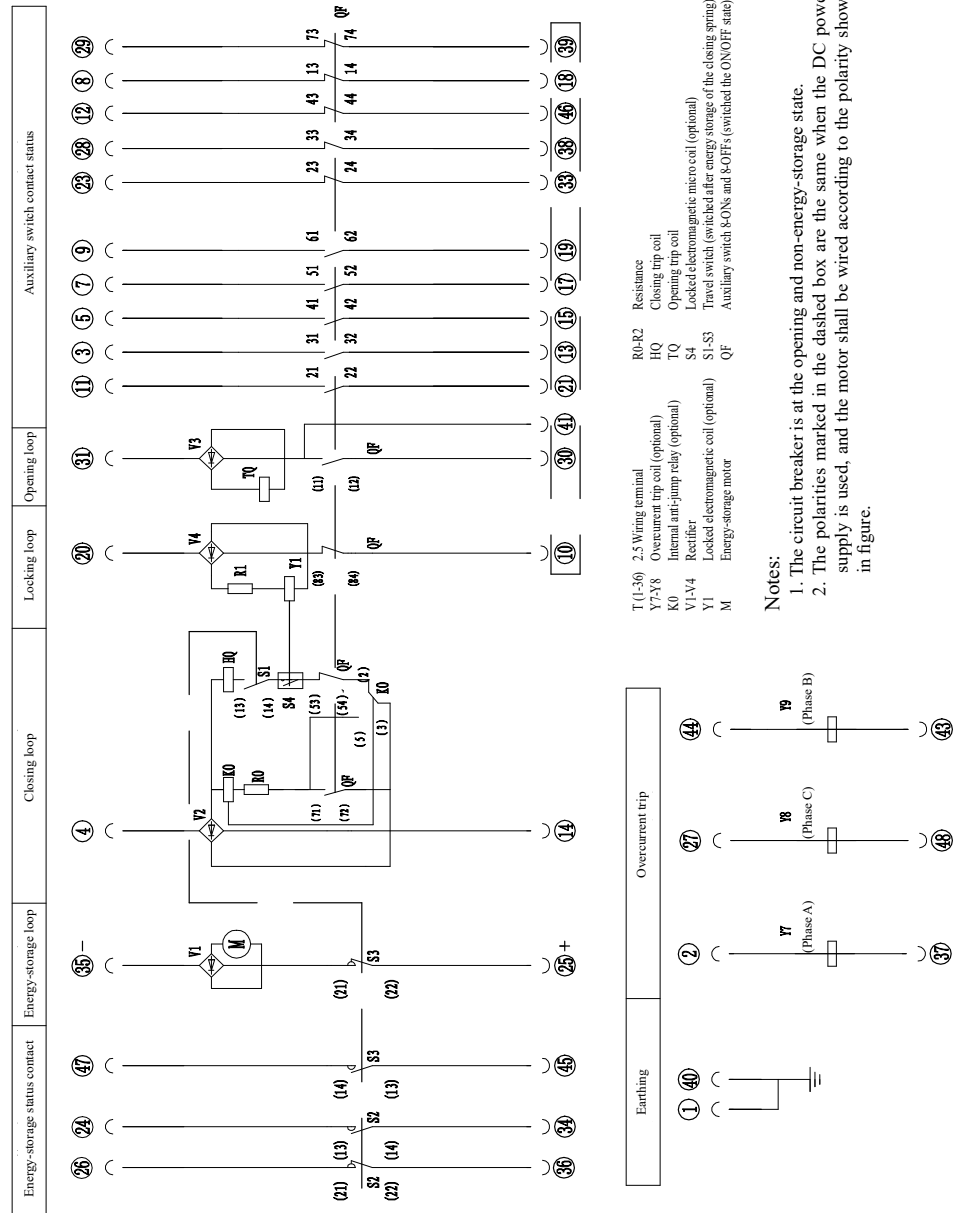

ZN63A-12 Indoor Medium-voltage AC Vacuum Circuit Breaker

8 Ordering Technical Confirmation Form

ZN63A(VS1)-12 Indoor High Voltage AC Vacuum Circuit Breaker Order Technical Confirmation Table

Please determine your requirements according to the items listed in the table below:

| | | | |
|---|--|---|--|
| Product structure | <input type="checkbox"/> Cart type <input type="checkbox"/> Fixed type <input type="checkbox"/> Side-mounted fixed type (<input type="checkbox"/> Left outlet <input type="checkbox"/> Right outlet) | | |
| Order qty. (unit) | | Primary structure | Insulated cylinder type air insulation |
| Rated current (A) | <input type="checkbox"/> 630 <input type="checkbox"/> 1250 <input type="checkbox"/> Others _____ | | |
| Rated short circuit breaking current (kA) | <input type="checkbox"/> 20 <input type="checkbox"/> 25 <input type="checkbox"/> 31.5 <input type="checkbox"/> 40 | | |
| Phase distance (mm) | <input type="checkbox"/> 210 <input type="checkbox"/> 275 Note: The phase distance is the center distance between the A and B phase or between the B and C phases. | | |
| Inter-electrode distance (mm) | <input type="checkbox"/> 275 <input type="checkbox"/> 310 Note: Inter-electrode distance is the center distance between the top and bottom outlet terminals. | | |
| Operating voltage (V) | OFF, ON: <input type="checkbox"/> AC220 <input type="checkbox"/> DC220 <input type="checkbox"/> Others _____ Stored energy: <input type="checkbox"/> AC220 <input type="checkbox"/> DC220 <input type="checkbox"/> Others _____ | | |
| Anti-bounce device | <input type="checkbox"/> No anti-bounce (standard) <input type="checkbox"/> With anti-bounce | | |
| Locking device (fixed type non-cart locking) | Closing lock: <input type="checkbox"/> No lock (standard) <input type="checkbox"/> With lock, operating voltage _____ V | | |
| | Cart lock: <input type="checkbox"/> No lock (standard) <input type="checkbox"/> With lock, operating voltage _____ V | | |
| Overcurrent device | <input type="checkbox"/> No overcurrent (standard) <input type="checkbox"/> A and C two-phase overcurrent <input type="checkbox"/> A, B, C three-phase overcurrent Note: The operating current of the standard overcurrent coil is 5A. | | |
| Undervoltage trip device | <input type="checkbox"/> No (standard) <input type="checkbox"/> Yes | | |
| Cart type option (This option is not available for fixed type) | Earth: <input type="checkbox"/> Bottom friction earth (standard) <input type="checkbox"/> Rails earthed on both sides Program lock: <input type="checkbox"/> No (standard) <input type="checkbox"/> Lock chassis cart (key hole on cabinet door) <input type="checkbox"/> Lock mechanism <input type="checkbox"/> Lock circuit breaker baffle Cabinet door interlock: <input type="checkbox"/> No (standard) <input type="checkbox"/> With door closing operation interlock function | | |
| Fixed type circuit breaker interlock output (mm) (This option is not available for cart type) | Top opening interlock extended: <input type="checkbox"/> Left (standard 50) _____ <input type="checkbox"/> Right _____ <input type="checkbox"/> No | | |
| | Spindle extended: <input type="checkbox"/> No (standard) <input type="checkbox"/> Left _____ <input type="checkbox"/> Right _____ | | |
| Secondary wiring plan | <input type="checkbox"/> Tengen standard plan (see catalog) <input type="checkbox"/> Non-standard plan (with attached figure) | | |
| Outline dimensions | <input type="checkbox"/> Tengen standard outline (see catalog) <input type="checkbox"/> Non-standard plan (with attached figure) | | |
| Standard accessories | Cart type: one energy-storing handle, one cart handle (length 80mm), one aviation plug female connector (58 core with 40 pieces of 1.5mm ² pins), one coiled pipe (about 300mm length); 1250A and below standard Al contact arm contact surface is coated with common silver, and 1600A and above standard copper contact arm is coated with common silver. Fixed type: one energy-storing handle | | |
| Other special requirements | | Ordering unit (seal) Sign: _____ Confirmation date: _____ Tel: _____ | |

Note: If no option is selected, the product is manufactured according to the standard requirements of the Tengen by default!