


# ZN63A-12(VS1) Indoor High-Voltage AC Permanent Magnet Vacuum Circuit Breaker



## 1 Product overview

- 1.1 Suitable for switching various loads with different properties and frequent operations in three-phase AC 50Hz, 10kV power system.
- 1.2 For protection and control of electrical equipment used in industrial and mining, enterprises, power plant, and substation.
- 1.3 With central handcart type switch cabinet and XGN fixed switch cabinet provided for KYN28A-12(GZS1).
- 1.4 Available standards
  - GB/T 1984-2014 High-voltage alternating-current circuit-breakers
  - GB/T 11022-2011 Common specifications for high-voltage switchgear and controlgear standards
  - DL/T 402-2016 High-voltage alternating-current circuit-breakers

## 2 Type designation

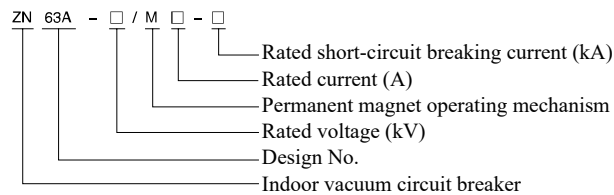

## 3 Product parameters



No.	Name	Unit	Value				
1	Rated voltage	kV	12				
2	Rated power frequency withstand voltage (1 minute)		42				
3	Rated lightning impulse withstand voltage (peak)		75				
4	Rated frequency	Hz	50				
5	Rated current	A	630 1250	630 1250 1600 2000 2500 3150	1250 1600 2000 2500 3150 4000		
6	Rated circuit-breaker breaking current	kA	20、25	31.5	40		
7	Rated short-circuit making current (peak)		50、63	80	100		
8	Rated short-time withstand current		20、25	31.5	40		
9	Rated peak withstand current		50、63	80	100		
10	Rated short-circuit duration	S	4				
11	Rated operating sequence		O—0.3s—CO—180s—CO		O—180s—CO—180s—CO		
12	Rated short-circuit breaking current ON/OFF times	Times	30 (50 customized)				
13	Mechanical life		30000				
14	Rated operating voltage	V	AC/DC220				
15	Allowable accumulative wear thickness of dynamic and static contacts	mm	3				

Note: A forced air-cooled is required for 4000A and above rated current.

## ZN63A-12(VS1) Indoor High-Voltage AC Permanent Magnet Vacuum Circuit Breaker

### 4 Working environment conditions

- 4.1 The ambient air temperature does not exceed 40°C, the average measured within 24h does not exceed 35°C, and the minimum ambient air temperature is -1°C;
- 4.2 Altitude: Not higher than 1000m;
- 4.3 The surrounding air is not polluted obviously by dust, smoke, corrosive or flammable gas, steam, and salt mist;
- 4.4 Humidity conditions: daily mean value is not greater than 95%; monthly mean value is not greater than 90%; the average of water vapor pressure is not greater than 2.2kPa; the average of the monthly water steam pressure is not greater than 1.8KPa;
- 4.5 Vibration or ground movement from the outside of switchgear or control equipment can be negligible;
- 4.6 The amplitude of the conducted electromagnetic interference in the secondary system cannot exceed 1.6kV;
- 4.7 Special use conditions  
If the altitude at the installation site exceeds 1000m, or the ambient air temperature exceeds the limit specified in the normal working conditions or the installation site is highly humid to easily cause condensation, please contact our company for customization.


### 5 Technical features of product

- 5.1 Excellent overall performance of circuit breaker
  - 5.1.1 The arc extinguish chamber and operating mechanism of circuit breaker are configured at front and rear, and are connected into a whole through the transmission mechanism.
  - 5.1.2 The mechanical life is not below 30000 times.
- 5.2 The advanced vacuum arc extinguish chamber uses copper-chromium alloy contact and longitudinal magnetic field contact structure.
- 5.3 Enhanced insulating cylinder
  - 5.3.1 The insulating cylinder is formed with new APG process.
  - 5.3.2 The inner skirt edge and reinforced ribs are provided in the insulating cylinder, improving the insulation level and dynamic stable current resistant capacity.
  - 5.3.3 The vacuum arc extinguish chamber is installed in an insulating cylinder to efficiently prevent damage and surface contamination due to foreign matters while shortening the overall size of circuit breaker obviously.
- 5.4 Flexible and simple operating mechanism
  - 5.4.1 The operating mechanism uses a permanent magnet mechanism with electric closing / opening and manual emergency opening functions.
  - 5.4.2 When the circuit breaker is working, the energy from the permanent magnet mechanism will be transferred to the link mechanism through the output cam and then to the dynamic contact through the link mechanism.
  - 5.4.3 No adjustment is required with very little maintenance.

## ZN63A-12(VS1) Indoor High-Voltage AC Permanent Magnet Vacuum Circuit Breaker


### 6 Outline and installation dimensions

#### 6.1 Outline and installation dimensions of ZN63A-12(VS1) handcart type permanent magnet circuit breaker

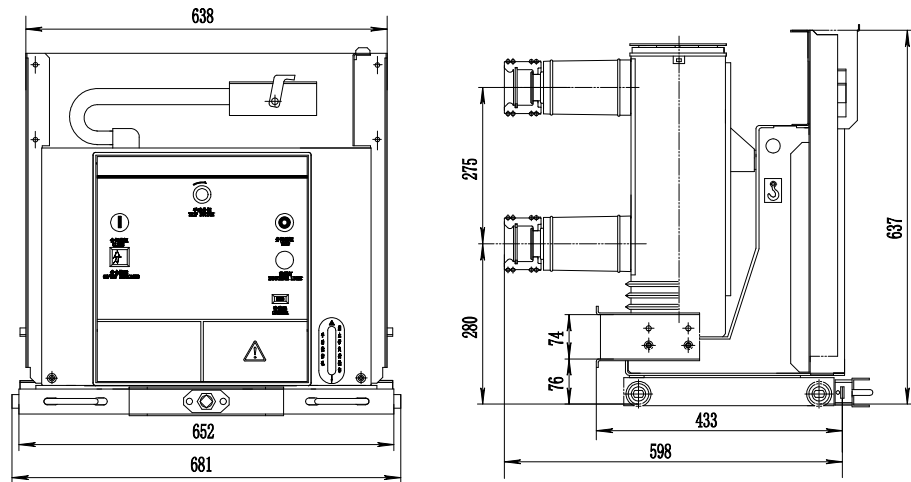

Rated current (A)	630	1250	1600
Rated short-circuit breaking current (kA)	20/25/31.5	25/31.5/40	31.5/40
Size of matched static contact (mm)	Φ35	Φ49	Φ55
Phase distancing (mm)	210±1.5		

Note: The meshing size between dynamic and static contacts is not less than 15mm.

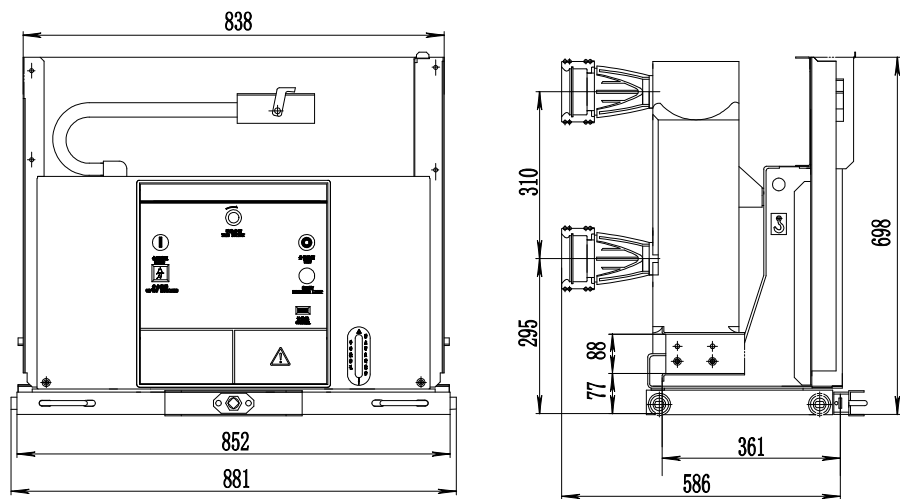


Rated current (A)	1600	2000	2500-4000
Rated short-circuit breaking current (kA)	31.5/40		
Size of matched static contact (mm)	Φ79		Φ109
Phase distancing (mm)	275±1.5		

Note:


1. The meshing size between dynamic and static contacts is not less than 15mm;
2. A forced air-cooled is required when the rated current is 4000A.

## ZN63A-12(VS1) Indoor High-Voltage AC Permanent Magnet Vacuum Circuit Breaker

### 6.2 Outline and installation dimensions of ZN63A-12(VS1) fixed permanent magnet circuit breaker

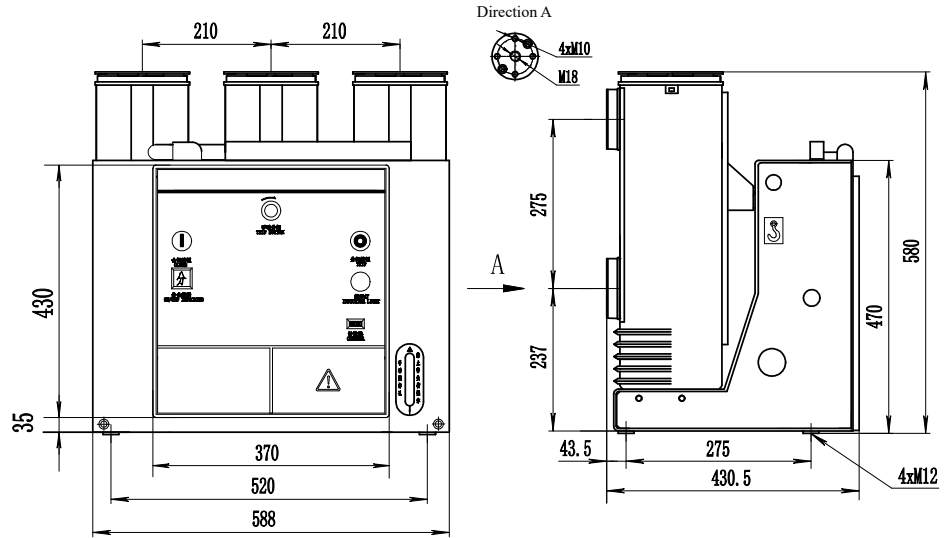

Rated current (A)	630	1250	1600
Rated short-circuit breaking current (kA)	20/25/31.5	25/31.5/40	31.5/40
Phase distancing (mm)	210±1.5		

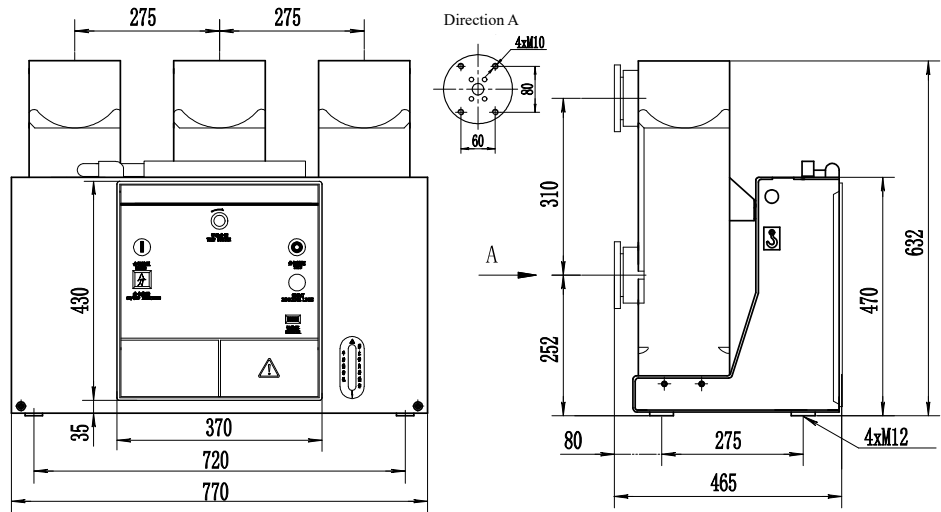


Rated current (A)	2000	2500	3150	4000
Rated short-circuit breaking current (kA)	31.5/40			
Phase distancing (mm)	275			

Note: A forced air-cooled is required for 4000A and above rated current.

# ZN63A-12(VS1) Indoor High-Voltage AC Permanent Magnet Vacuum Circuit Breaker

## 7 Secondary scheme schematic diagram

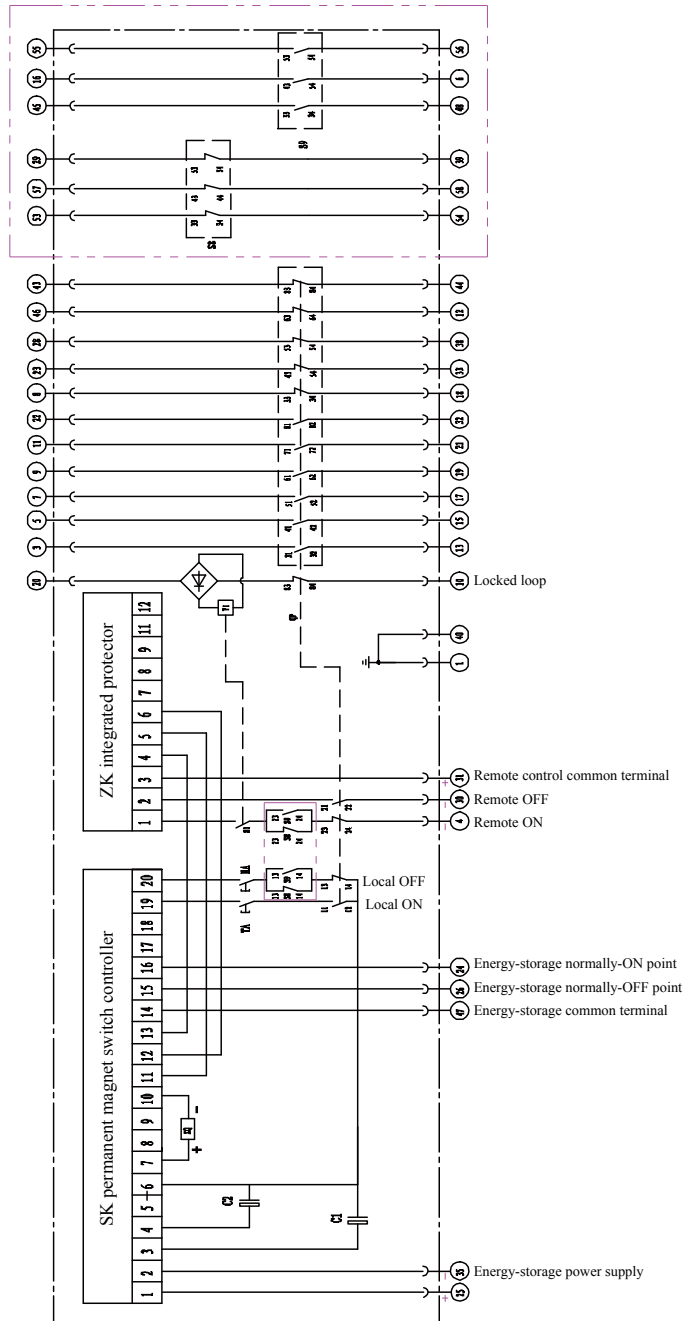

Note: Handcart type is marked with double dots line. No this connector is required for fixed type; 2.5mm<sup>2</sup> is available for 25# and 35# lines.

S8, S9: Test position and work position	XQ: Closing and opening coils	SK: Permanent magnet switch controller	ZK: Integrated controller
HA: Local ON button	TA: Local OFF button	QF: Auxiliary switch	C1-C2: Capacitor

## ZN63A-12(VS1) Indoor High-Voltage AC Permanent Magnet Vacuum Circuit Breaker

### 8 Order technology confirmation form

#### Order Technology Confirmation Form for ZN63A-12 Permanent Magnet Vacuum Circuit Breaker

Determine your requirements according to the items listed in table below:

Product model	<input type="checkbox"/> Handcart type <input type="checkbox"/> Fixed type	
Order quantity (pcs)		Primary structure: <input type="checkbox"/> Insulated cylinder type <input type="checkbox"/> Sealed pole type
Rated current (A)	<input type="checkbox"/> 630 <input type="checkbox"/> 1250 <input type="checkbox"/> Others___	
Rated short-circuit breaking current (kA)	<input type="checkbox"/> 20 <input type="checkbox"/> 25 <input type="checkbox"/> 31.5 <input type="checkbox"/> 40	
Phase distancing (mm)	<input type="checkbox"/> 210 <input type="checkbox"/> 275	
Operating voltage (V)	<input type="checkbox"/> AC220 <input type="checkbox"/> DC220 <input type="checkbox"/> Others_____	
Lock device	ON lock: <input type="checkbox"/> No lock (standard configuration) <input type="checkbox"/> With lock, operating voltage___V Handcart lock: <input type="checkbox"/> No lock (standard configuration) <input type="checkbox"/> With lock, operating voltage___V	
Handcart type Chassis cart option (this option is not required for fixed type)	Grounded: <input type="checkbox"/> Bottom friction grounded (standard configuration) <input type="checkbox"/> RAILS grounded at both sides <input type="checkbox"/> Contact grounded Program lock: <input type="checkbox"/> No (standard configuration) <input type="checkbox"/> With chassis cart locked <input type="checkbox"/> With circuit breaker baffle locked Cabinet door interlock: <input type="checkbox"/> No (standard configuration) <input type="checkbox"/> With door closing interlock function	
Fixed interlock (This item is not available for handcart type)	Spindle extended: <input type="checkbox"/> No (standard configuration)) <input type="checkbox"/> Left___ <input type="checkbox"/> Right__	
Secondary wiring scheme	<input type="checkbox"/> TENGEN's standard scheme (see catalog) <input type="checkbox"/> No-standard scheme (scheme should be provided))	
Outline dimensions	<input type="checkbox"/> TENGEN's standard appearance(see catalog) <input type="checkbox"/> No-standard appearance(scheme should be provided)	
Other special requirements		Ordering unit (seal)  Sign: Confirmation date: Tel:

Note: If not ticked, all options shall be manufactured according to the TENGEN's standard configurations.